

PXle-3127e/3125e

3U 11th Generation Intel® Core™ i7/i5 Processor based PXI Express Controller



PXle-3127e

Introduction

The JYTEK PXle-3127e/3125e PXI Express embedded controller is based on the 11th generation Intel® Core™ i7/i5/ processor. It is designed specifically for hybrid PXI Express-based testing systems, providing maximum computing power for a wide range of testing and measurement applications.

The PXle-3127e/3125e utilizes separate computing engines on a single processor, which allows for the execution of numerous independent tasks simultaneously in a multi-tasking environment. With auto-configured PCIe switches, this controller can support four x4 or two x8 link PXI Express link capability, with maximum system throughput up to 16 GB/s by PCI Express 3.0 bus.

Equipped with up to 64 GB of DDR4 memory, and state-of-the-art 11th Generation Intel® Core™ i7-11850HE/i5-11500HE processors, the JYTEK PXle-3127e/3125e is a high-performance solution for a variety of testing and measurement applications.

The JYTEK PXle-3127e/3125e offers a variety of interface options, including two DisplayPort connectors for connecting to two monitors, dual USB 3.0 connections for high-speed peripheral devices, dual Gigabit Ethernet ports (one for LAN connection and the other for controlling LXI instruments), four USB 2.0 ports for peripheral devices and USB instrument control, and a Micro-D GPIB connector for GPIB instrument connection, allowing for control of hybrid PXI-based testing systems.

The JYTEK PXle-3127e/3125e supports a variety of operating systems, including Windows 11 IoT Enterprise, Windows 10 IoT Enterprise, Linux, CentOS, and Ubuntu. It also features TPM 2.0 for security and complies with various EMC standards to ensure reliability. This 3U/4-slot PXI standard controller includes one system slot and three controller expansion slots.

In high-stakes testing scenarios, where precision and dependability are paramount, the PXle-3127e/3125e excels. Whether managing high-speed LAN connections, controlling LXI instruments, or handling peripheral devices, this embedded controller is a reliable companion, combining cutting-edge technology with unwavering performance to meet the stringent demands of professionals in the field of testing and measurement.


Features

- 11th Gen Intel Core™ i7-11850HE/i5-11500HE processor (codename “Tiger Lake”)
- 8/6 cores and 16/12 threads
- Up to 64 GB dual channel DDR4 memory at 3200 MT/s (non-ECC memory)
- Maximum system throughput up to 16 GB/s by PCI Express 3.0 bus
- Supports four links x4 or two links x8 PXI Express link indent to PXI Express chassis
- Integrated I/O
 - 2 USB 3.2 Gen1 5Gbps port
 - 4 USB 2.0
 - Dual Ethernet port: 2.5GbE port and GbE port
 - 1 RS-232/422/485 port
 - Trigger I/O for advanced PXI trigger functions

Operating System

- Windows 10
- Linux 64-bit

Product Illustration

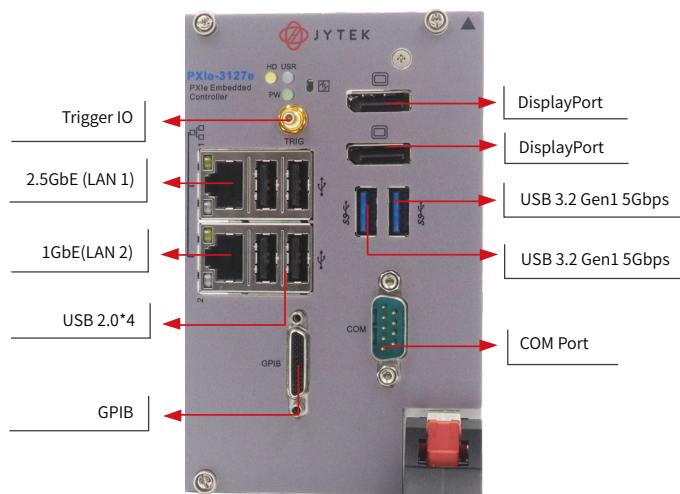

Ordering Information

- PXle-3127e (PN : JY3916604-01)
3U Intel Core™ i7-11850HE PXIe Gen3 Controller with 16GB memory & 500GB SSD, Windows 10 professional 64-bit
- PXle-3125e (PN : JY1702524-01)
3U Intel Core™ i5-11500HE PXIe Gen3 Controller with 16GB memory & 500GB SSD, Windows 10 professional 64-bit

Special Operating Restrictions

- BIOS Boot Mode: Only UEFI mode is supported; Legacy mode is not supported.

Accessories

- ACL-IEEEE488-MD1-A
25-pin micro-D to GPIB cable, 1 meter length

Specifications

Model Name	PXle-3127e	PXle-3125e
Core Features		
CPU	Intel® Core™ i7-11850HE 2.6GHz (Turbo 4.7GHz)	Intel® Core™ i5-11500HE 2.6GHz (Turbo 4.5GHz)
DMI	DMI 3.0 8GT/s	
Chipset	Intel® HM570E	
Memory	Up to 64 GB dual channel DDR4 memory at 3200 MT/s (non-ECC memory)	
Display		
DisplayPort	3840 x 2160 @60Hz DisplayPort adapters to other standards are available, w/ max. resolution dependent on adapter. Support only DisplayPort to DVI or HDMI, but not support DisplayPort VGA.	
PXI Express Chassis I/O		
Bus	PCI Express 3.0 (backwards compatible with 2.x and 1.x)	
System Bandwidth	Up to 16GB/s	
PXIe Link Configuration	2 Link Mode: x8 x8 4 Link Mode: x4 x4 x4 x4	
I/O Connectivity		
Storage	One SATA 6.0 Gb/s port with a 2.5" SATA drive bracket	
Ethernet	Intel® Ethernet controller i225LM, I210	
USB	2 x USB 3.2 Gen1 and 4 x USB 2.0, front-mounted	
Trigger I/O	SMB connector, front-mounted, to route an external trigger signal to/from PXI trigger bus	
Mechanical and Environmental		
Dimensions	3U/4-slot PXI standard	
Slot Requirements	1 system slot plus 3 controller expansion slots	
Weight	1 kg (2.2 lbs)	
Operating Temp.	0° C to 55° C (32° F to 131° F) w/ SSD 0° C to 50° C (32° F to 122° F) w/ HDD	
Storage Temp.	-20° C to 70° C (-4° F to 158° F)	
Relative Humidity	5% to 95%, non-condensing	
Shock	30 G, half-sine, 11 ms pulse duration	
Vibration	Operating: 5 to 500 Hz, 0.21 GRMS, 3 axes Non-operating: 5 to 500 Hz, 2.46 GRMS, 3 axes	
Emissions Compliance	EEN 61326-1, FCC Class B	
CE Compliance	Immunity: EN 61326-1	
Operating Systems	Windows 10, Linux 64-bit	

Block Diagram

